

Automatic Two Speed Electrohydraulic Press

Model 205/RM




Manufactured for Swade-Sir in Italy

Model No.205/R - 200 Tonne
Model No.205/RM - 200 Tonne

Specifications

Model	205/R	205/RM
Capacity/Tonne	200	200
Dimension A (mm)	2995	2910
Dimension B (mm)	1310	1310
Dimension C (mm)	2600	2600
Dimension D (mm)	1520	1520
Dimension E (mm)	1035	1000
Dimension F (mm)	520	520
Ram Stroke (mm)	520	520
Rapid Pump Capacity Lt/Min	60	60
Slow pump Capacity Lt/Min	4,5	14,5
Rapid Approach Speed (mm/min)	1300	1300
Slow Approach Speed (mm/min)	95	95
Weight (kg)	4150	4300

- Rapid motor- driven Electrohydraulic Presses Machine (three phase 230/400-50Hz) with pressure gauge and double speed hydraulic pump, attained by means of vane pump for rapid approach and return and a pump with axial pistons for the working-phase.
- They are all fitted with a calibration valve and a three-position valve (feed-neutral-return).
- Complete with oil, these presses have a power operated table lift, using twp hydraulic rams.
- Shafts are in treated and chrome plated special steel.
- The Model 205/RM, thanks to the ram adjustable by a traverse device, represents the ideal solution, when one needs different operations on a single component.
- The CE execution provides that the machines are equipped with two-hand control electric interlock and with rear and side protective panels.

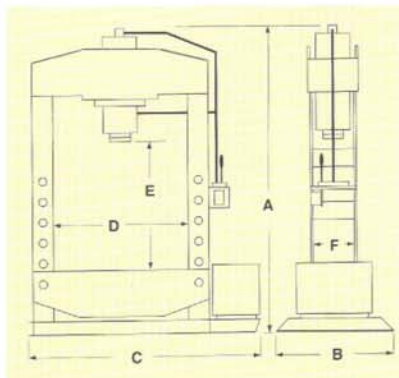

Swadesir International Pty Ltd.

5-7 Strong Avenue, Thomastown. 3074

Phone: (03) 9460 3444 Fax: (03) 9460 8777

www.swadesir.com.au Email: infosupport@swadesir.com.au

0105